



Ruckus Wireless™ ZoneFlex™ 7300 Series

Single/Dualband 802.11n Smart Wi-Fi® Indoor Access Points



Benefits

- Best-in-class mid-range performance at lowest cost
- Extended range requires fewer APs
- Wire-like wireless reliability
- Sleek, low profile enclosure for ease-of-deployment
- Super simple configuration and management
- Flexible deployment options
- Standalone or controller-based deployment
- Smart wireless meshing
- Investment protection for legacy Wi-Fi networks
- Hassle free migration to higher speed Wi-Fi
- Multiple Ethernet ports

The Ruckus ZoneFlex 7300 series delivers high-performance and reliable 802.11n wireless networking at the industry's most affordable price point. Unlike any other 802.11n wireless solution in its class, the ZoneFlex 7300 combines patented dynamic beamforming and automatic interference mitigation to deliver consistent, predictable performance at extended ranges with 4 dBi of signal gain and 10 dB of interference rejection.

The ZoneFlex 7300 delivers a 2- to 4-fold increase in signal range with lower packet error rates while reducing the number of APs required to deliver dependable Wi-Fi service. Each ZoneFlex 7300 integrates Ruckus-patented BeamFlex™, a software-controlled, high gain antenna array that continually forms and directs each 802.11n packet over the best performing signal path. And because the ZoneFlex 7300 automatically adapts to environmental changes, once deployed, enterprises never have to worry about constant site surveys as the environment changes.

A sleek and low-profile design, the ZoneFlex 7300 was purpose-built for cost-minded enterprises requiring reliable high speed client connectivity. It is ideal for a variety of enterprise and hotspot environments including hotels, schools, retail outlets, branch offices and public venues.

Offered in single and dual band models, the ZoneFlex 7300 series can be deployed as a standalone access point or as part of the centrally-controlled Smart Wireless LAN with the Ruckus ZoneDirector™. The ZoneFlex 7300 can also be easily deployed using SmartMesh™ Networking to extend Wi-Fi services in locations where Ethernet cabling is not available or cost prohibitive.

Standard 802.3af power over Ethernet (PoE) leverages existing PoE switches eliminating costly and cumbersome upgrades.

Patented BeamFlex™ Technology Extends Signal Range, Improves Stability of Client Connections

All ZoneFlex 7300 Smart Wi-Fi® access points integrate a software-controlled smart antenna array that delivers 4 dBi of signal gain and 10 dB of interference rejection. This allows a 2 to 4x improvement in signal range and a reduction in packet loss from the ability to automatically avoid interference and obstacles.

Advanced WLAN Applications with Smart/OS

When used with the Ruckus ZoneDirector™ Smart WLAN controller, each ZoneFlex 7300 supports a wide range of value-added applications such as guest networking, Smart Wireless Meshing, Dynamic PSK, hotspot authentication, wireless intrusion detection and many more. With Smart/OS, up to 32 discrete WLANs can be created and mapped to the same or different APs or VLANs. WLANs can also be grouped and shared by specific APs. In a centrally managed configuration, the ZoneFlex 7300 works with a wide range of authentication servers including Microsoft's Active Directory, LDAP, and RADIUS.

Flexible Deployment Options

ZoneFlex 7300 APs can be deployed in as a standalone AP or as part of a centrally managed wireless LAN using ZoneDirector Smart WLAN controllers. ZoneFlex 7300's can be deployed across any L2/L3 network and/or meshed without Ethernet cabling. When used with the ZoneDirector, each ZoneFlex 7300 is automatically configured through the network making deployment quick and easy.

Complete Local and Remote Management

Each ZoneFlex 7300 can be managed as a standalone AP through a Web-based GUI, using SNMP or through the Ruckus FlexMaster™ Wi-Fi remote management system. Local management can also be performed using the ZoneDirector Smart WLAN controller. FlexMaster Management is a LINUX based software platform that uses industry-standard protocols to perform bulk configuration, fault detection, monitoring and a wide range of troubleshooting capabilities over a wire area connection. The ZoneDirector enables local management and control of APs, adding value-added services such as transmit power and channel management, guest networking and meshing.



7343 and 7363 (Shown) Feature Two 10/100 Mbps and one 802.3af PoE 10/100/1000 Mbps Ethernet port support

7341 (Not Shown) has one 802.3af PoE 10/100/1000 Mbps Ethernet port support

High gain directional antenna elements not only deliver signal gain but also interference avoidance for range extension, reliability and high data rates

More than 300 potential antenna combinations can be chosen for high availability of Wi-Fi



Benefits

Best-in-class mid-range performance at lowest cost

Unprecedented price/performance with extended range at the industry's most affordable price point for both single and dual-band

Extended range requires fewer APs

Dynamic beamforming delivers a 2x to 4x increase in Wi-Fi® signal coverage minimizing the number of APs required to service any area

Wire-like wireless reliability

Patented smart antenna array, beamforming and Quality of Service technologies combine to avoid interference and minimize packet loss

Sleek, low profile enclosure for ease-of-deployment

Aesthetically-pleasing design fits almost anywhere

Super simple configuration and management

The industry's simplest configuration and management through a Web-based wizard and automated deployment capabilities

Flexible deployment options

Standalone or controller-based deployment

Smart wireless meshing

When used with a ZoneDirector™ Smart WLAN controller, the ZoneFlex™ 7300 easily extends Wi-Fi services to areas where Ethernet cabling isn't available, possible or cost effective

Investment protection for legacy Wi-Fi networks

Compatible with existing wireless investments, the ZoneFlex 7300 series enhances performance and range for legacy 802.11a/b/g clients

Hassle free migration to higher speed Wi-Fi

Support for standard 802.3af power over Ethernet allows enterprises to use existing PoE switches without costly upgrades

Multiple Ethernet ports

Three Ethernet ports enable connectivity of wired devices such as printers, registers, VoIP phones, servers, etc.



Features

- Single (2.4 GHz) and dual-band (5 GHz/2.4 GHz) options*
- Dynamic beamforming and advanced RF management
- Up to 4 dBi signal gain/10 dB interference rejection
- Automatic interference avoidance, optimized for high-density environments
- Integrated smart antenna array with over 300 unique patterns for high reliability
- Standard 802.3af Power over Ethernet (PoE)
- 2 to 4 times extended range and coverage
- IP multicast video streaming support
- Four queues per client station
- Advanced QoS packet classification and automatic priority for latency-sensitive traffic
- Band steering* and airtime fairness support
- Up to 8 BSSIDs per radio with unique QoS and security policies
- WEP, WPA-PSK (AES), 802.1X support for RADIUS and Active Directory**
- SmartMesh™ Networking**
- Zero-IT and Dynamic PSK**
- Admission control/load balancing**
- Captive portal and guest accounts **
- Wall, desktop or ceiling mountable
- USB 2.0 port hardware option (special orders only)***


* ZoneFlex 7363 only

** When used with Ruckus ZoneDirector controller

*** Hardware build option with future software support

Affordable Performance for Enterprises

The ZoneFlex 7300 series integrates seamlessly with your existing network infrastructure, delivering best-in-class 802.11n performance and reliability at the industry's most affordable price—making it the ideal wireless solution for mid-range enterprise and branch office applications.

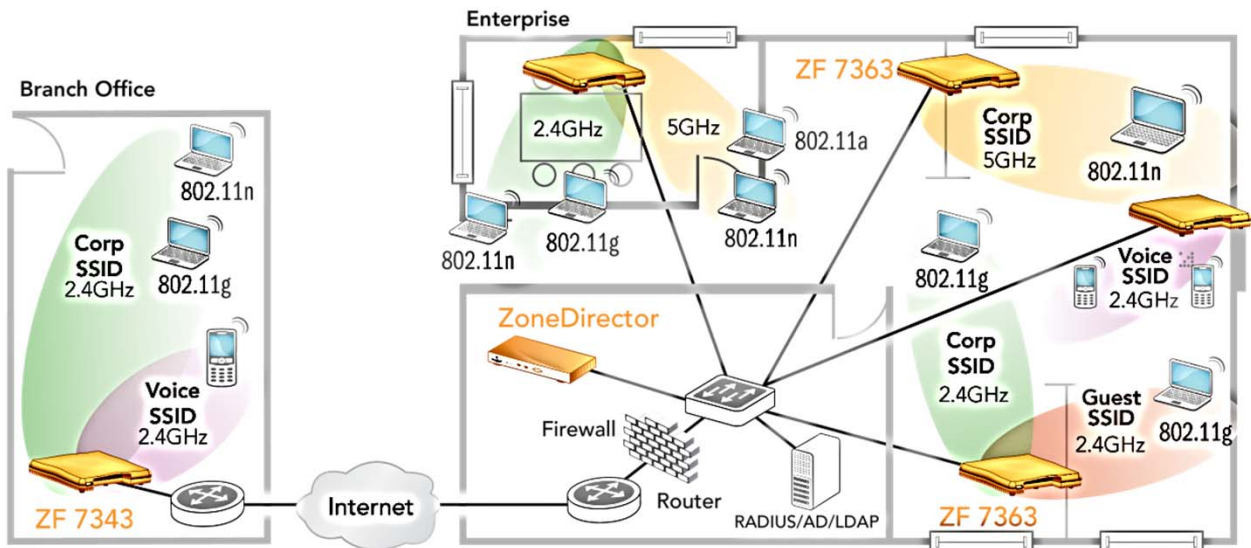


In-Room Deployment for Hotels

The ZoneFlex 7300 series is ideal for deployment in hotel guest rooms to provide wireless connection to high quality video and data access, as well as wired connections to IP phone and guest devices.

Deployment for Retail/Branch Offices

The ZoneFlex 7300 series is ideal for deployment in retail stores to provide inconspicuous wireless connection to high quality video, wireless IP phones and data access for handheld PoS bar code scanners.

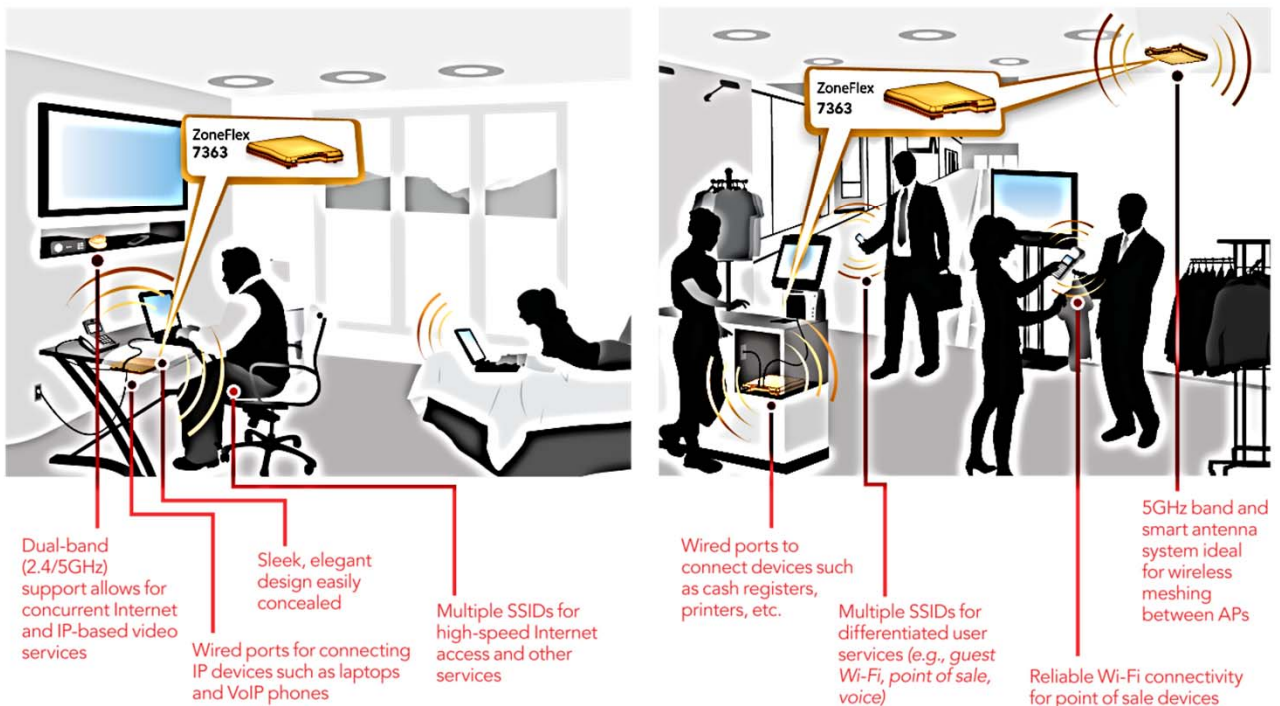

Specifications

Differences between products are color coded.

	7341	7343	7363
Physical Characteristics			
External Power Adapter	Input: 110-240V AC / Output: 12V DC, 1.5A	Input: 110-240V AC / Output: 12V DC, 1.5A	Input: 110-240V AC / Output: 12V DC, 1.5A
Power	Power over Ethernet Class 0	Power over Ethernet Class 0	Power over Ethernet Class 0
Physical Size	17.8cm (L), 17.8cm (W), 3.6cm (H) 7" L x 7" W x 1.4" H	17.8cm (L), 17.8cm (W), 3.6cm (H) 7" L x 7" W x 1.4" H	17.8cm (L), 17.8cm (W), 3.6cm (H) 7" L x 7" W x 1.4" H
Weight	397 grams (0.875 lbs.)	397 grams (0.875 lbs.)	397 grams (0.875 lbs.)
Antenna	Internal software-configurable antenna that provides over 300 unique patterns	Internal software-configurable antenna that provides over 300 unique patterns	Internal software-configurable antenna that provides over 300 unique patterns
Ethernet Ports	1 auto MDX, auto-sensing 10/100/1000 Mbps, RJ-45, PoE port	3 auto MDX, auto-sensing 10/100 Mbps, RJ-45 ports (1 is PoE)	3 auto MDX, auto-sensing 10/100 Mbps, RJ-45 ports (1 is PoE)
Environmental Conditions	Operating Temperature: 0°C to 40°C (32°F to 104°F) Operating Humidity: 15% - 95% non-condensing	Operating Temperature: 0°C to 40°C (32°F to 104°F) Operating Humidity: 15% - 95% non-condensing	Operating Temperature: 0°C to 40°C (32°F to 104°F) Operating Humidity: 15% - 95% non-condensing
Power Draw	9W (PoE), 9W (12V DC)	9W (PoE), 9W (12V DC)	12.95W (PoE), 12W (12V DC)
Performance and Supported Configurations			
Concurrent Clients	100+	100+	200+ (100+ per radio)
Target UDP Throughput	150 Mbps sustainable throughput for a 5,000 sq. ft area for each radio for each band	150 Mbps sustainable throughput for a 5,000 sq. ft area for each radio for each band	150 Mbps sustainable throughput for a 5,000 sq. ft area for each radio for each band
Vo-Fi Clients	Up to 20 simultaneously	Up to 20 simultaneously	Up to 20 simultaneously
Traffic Management and Quality of Service			
Classes of Service	Voice, video, best effort and background	Voice, video, best effort and background	Voice, video, best effort and background
Software Queues	Four per station	Four per station	Four per station
802.11e	Supported	Supported	Supported
Automatic Traffic Classification	Automatic prioritization of VoIP and video traffic	Automatic prioritization of VoIP and video traffic	Automatic prioritization of VoIP and video traffic
Advanced QOS	Rate limiting, band steering and airtime fairness	Rate limiting, band steering and airtime fairness	Rate limiting, band steering and airtime fairness
VLAN Support	802.1Q	802.1Q	802.1Q
Heuristic Classification	Supported	Supported	Supported
Deployment			
Options	<ul style="list-style-type: none"> Managed by ZoneDirector Individually managed Managed by FlexMaster Management 	<ul style="list-style-type: none"> Managed by ZoneDirector Individually managed Managed by FlexMaster Management 	<ul style="list-style-type: none"> Managed by ZoneDirector Individually managed Managed by FlexMaster Management
Management			
Configuration	Web user interface, CLI (Telnet), SSH HTTP/S, SNMP via ZoneDirector, HTTPS/XML/SOAP via FlexMaster	Web user interface, CLI (Telnet), SSH HTTP/S, SNMP via ZoneDirector, HTTPS/XML/SOAP via FlexMaster	Web user interface, CLI (Telnet), SSH HTTP/S, SNMP via ZoneDirector, HTTPS/XML/SOAP via FlexMaster
Statistics	LAN, wireless and associated stations (accessible via Web UI)	LAN, wireless and associated stations (accessible via Web UI)	LAN, wireless and associated stations (accessible via Web UI)
Auto AP Software Updates	FTP or TFTP, remote auto available	FTP or TFTP, remote auto available	FTP or TFTP, remote auto available
Wi-Fi*			
Standards	IEEE 802.11a/b/g/n 2.4 GHz and 5.8 GHz	IEEE 802.11a/b/g/n 2.4 GHz and 5.8 GHz	IEEE 802.11a/b/g/n 2.4 GHz and 5.8 GHz
Supported Data Rates	<ul style="list-style-type: none"> 802.11n: 6.5 Mbps – 130 Mbps (20 MHz) 6.5 Mbps – 300 Mbps (40 MHz) 802.11a: 54, 48, 36, 24, 18, 12, 9 and 6 Mbps* 802.11b: 11, 5.5, 2 & 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9 and 6 Mbps 	<ul style="list-style-type: none"> 802.11n: 6.5 Mbps – 130 Mbps (20 MHz) 6.5 Mbps – 300 Mbps (40 MHz) 802.11a: 54, 48, 36, 24, 18, 12, 9 and 6 Mbps* 802.11b: 11, 5.5, 2 & 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9 and 6 Mbps 	<ul style="list-style-type: none"> 802.11n: 6.5 Mbps – 130 Mbps (20 MHz) 6.5 Mbps – 300 Mbps (40 MHz) 802.11a: 54, 48, 36, 24, 18, 12, 9 and 6 Mbps* 802.11b: 11, 5.5, 2 & 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9 and 6 Mbps
Radio Chains	2 transmit x 2 receive (per radio)	2 transmit x 2 receive (per radio)	2 transmit x 2 receive (per radio)
Spatial Streams	2 (per radio)	2 (per radio)	2 (per radio)
Channelization	20 MHz and/or 40 MHz	20 MHz and/or 40 MHz	20 MHz and/or 40 MHz
Frequency Band	<ul style="list-style-type: none"> IEEE 802.11b: 2.4 – 2.484 GHz IEEE 802.11n: 2.4 – 2.484 GHz 	<ul style="list-style-type: none"> IEEE 802.11b: 2.4 – 2.484 GHz IEEE 802.11n: 2.4 – 2.484 GHz 	<ul style="list-style-type: none"> IEEE 802.11a: 5.15 – 5.85 GHz IEEE 802.11n: 2.4 – 2.484 GHz and 5.15 – 5.85 GHz

Ruckus Wireless™ ZoneFlex™ 7300 Series

Specifications Continued

	7341	7343	7363
RF Power Output	<ul style="list-style-type: none"> 26 dBm for 2.4 GHz 	<ul style="list-style-type: none"> 26 dBm for 2.4 GHz 	<ul style="list-style-type: none"> 26 dBm for 2.4 GHz 24 dBm for 5GHz
	Country-specific power settings are configurable	Country-specific power settings are configurable	Country-specific power settings are configurable
Operating Channels	<ul style="list-style-type: none"> US/Canada: 1-11 Europe (ETSI X30): 1-13 Japan X41: 1-13 5 GHz channels: Country dependent for the following channel ranges: 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165 	<ul style="list-style-type: none"> US/Canada: 1-11 Europe (ETSI X30): 1-13 Japan X41: 1-13 5 GHz channels: Country dependent for the following channel ranges: 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165 	<ul style="list-style-type: none"> US/Canada: 1-11 Europe (ETSI X30): 1-13 Japan X41: 1-13 5 GHz channels: Country dependent for the following channel ranges: 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165
BSSID	Up to eight per radio	Up to eight per radio	Up to eight per radio
Power Save	Supported	Supported	Supported
Wireless Security	<ul style="list-style-type: none"> WEP, WPA-PSK, WPA-TKIP, WPA2 AES, 802.11i Authentication via 802.1X with the ZoneDirector, local authentication database, support or RADIUS, LDAP, and ActiveDirectory 	<ul style="list-style-type: none"> WEP, WPA-PSK, WPA-TKIP, WPA2 AES, 802.11i Authentication via 802.1X with the ZoneDirector, local authentication database, support or RADIUS, LDAP, and ActiveDirectory 	<ul style="list-style-type: none"> WEP, WPA-PSK, WPA-TKIP, WPA2 AES, 802.11i Authentication via 802.1X with the ZoneDirector, local authentication database, support or RADIUS, LDAP, and ActiveDirectory
Certifications	<ul style="list-style-type: none"> Wi-Fi Alliance WEEE/RoHS compliance US, Canada, Europe, India, Australia and New Zealand 	<ul style="list-style-type: none"> Wi-Fi Alliance WEEE/RoHS compliance US, Canada, Europe, India, Australia and New Zealand 	<ul style="list-style-type: none"> Wi-Fi Alliance WEEE/RoHS compliance US, Canada, Europe, India, Australia and New Zealand
	<ul style="list-style-type: none"> Brazil, China, Hong Kong, Mexico, Thailand, Vietnam EN-60601-1-2 	<ul style="list-style-type: none"> Brazil, China, Hong Kong, Mexico, Thailand, Vietnam EN-60601-1-2 	<ul style="list-style-type: none"> Brazil, China, Hong Kong, Mexico, Thailand, Vietnam EN-60601-1-2

* 5 GHz functionality is only available with ZoneFlex 7363

Ordering Information

ARRIS #	Mfg #	Description
TBD	TBD	Single band 802.11n Access Point (1-Port) 2.4 GHz
TBD	TBD	Single band 802.11n Access Point (3-Port) 2.4 GHz
TBD	TBD	Concurrent dual band 802.11n Access Point (3-Port) 2.4 and 5.8 GHz
794015	SVC-CTRCT	1 Year Service Contract Required

PLEASE NOTE: When ordering you must specify the destination region by indicating -US, -EU, -UK, -UN, -AU, -UU or -IN.

Contact ARRIS: (888) 353-9473 www.arrisi.com

BeamFlex, ZoneFlex, MediaFlex, MetroFlex, FlexMaster, ZoneDirector, SpeedFlex, SmartCast, and Dynamic PSK are trademarks of Ruckus Wireless, Inc.

The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice. ARRIS, the ARRIS logo, Auspice®, C3™, C4®, C4c™, Cadant®, C-COR®, CHP Max5000®, ConvergeMedia™, Cornerstone®, CORWave™, CXM™, DS®, Digicon®, ENCORE®, Flex Max®, HEM®, Keystone™, MONARCH®, MOXI®, n5®, nABLE®, nVision®, OpsLogic®, OpsLogic® Service Visibility Portal™, PLEXIS®, PowerSense™, QUARTET®, Regal®, ServAssure™, Service Visibility Portal™, TeleWire Supply®, TLX®, Touchstone®, VIPr™, VSM™, and WorkAssure™ are all trademarks of ARRIS Group, Inc. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and the names of their products. ARRIS disclaims proprietary interest in the marks and names of others. © Copyright 2011 ARRIS Group, Inc. All rights reserved. Reproduction in any manner whatsoever without the express written permission of ARRIS Group, Inc. is strictly forbidden. For more information, contact ARRIS.



www.arrisi.com